



DIFFUSERS

Sunline Diffuser

Features


- Available in 3 different sizes: 200 dia, 250 dia and 300 dia
- Stylish design
- Easily adjusted diffuser opening
- Low cost
- Lightweight rigid construction
- Easy to clean
- Scratch resistant surface
- Quiet
- Snap action clips for fast and easy installation
- Tapered neck for easy duct connection

Optional extras

- Available in motorised/remote controlled option.



Dimensions

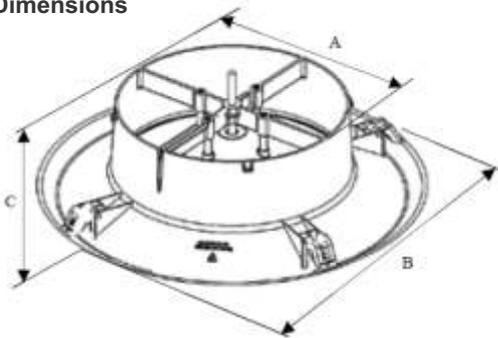

Grille Size	A Nominal	B Flange Size (mm)	C Height (mm)	Hole Diameter (mm)
200	200	364	114	314
250	250	413	114	364
300	300	464	114	414

Construction


- These outlets are injection moulded from white ABS plastic and have integrated spring loaded clips.

Applications

- Ideal for residential and commercial reverse cycle air-conditioning, heating and ventilation applications.

Performance

200 Dia Sunline Diffuser

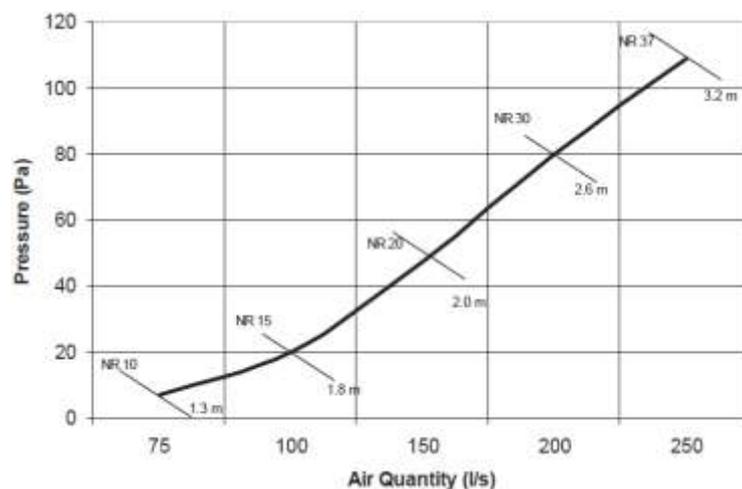


DIFFUSERS


Sunline Diffuser



250 Dia Sunline Diffuser

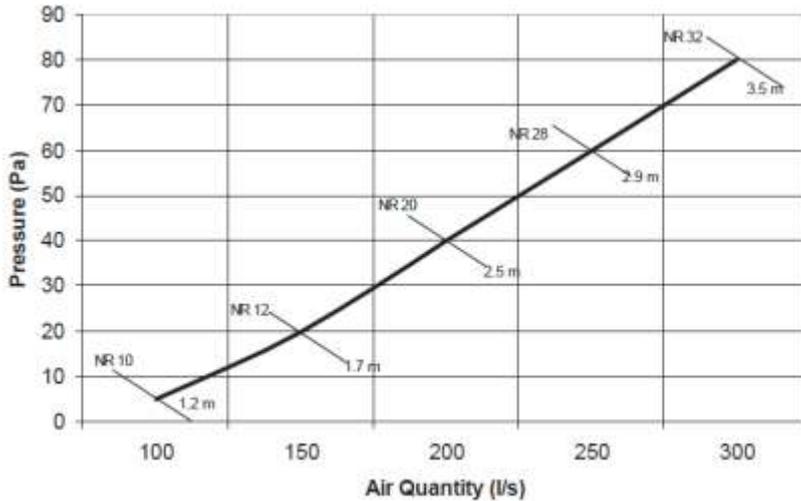


250 Dia Sunline Diffuser

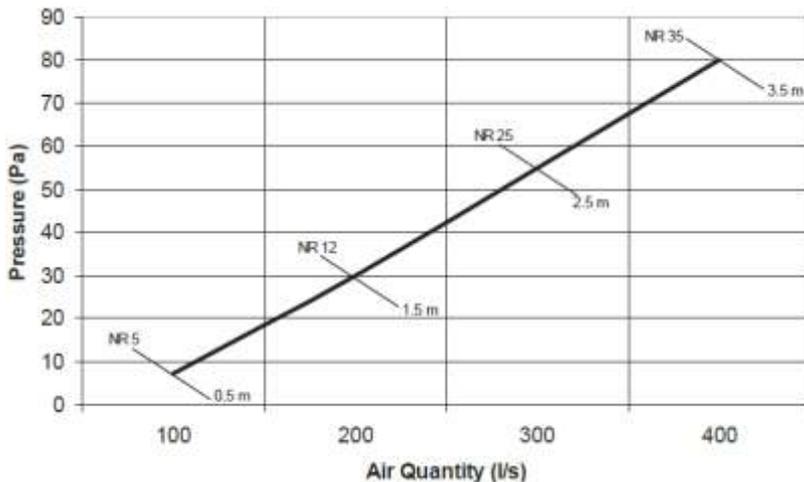

Installation

1. Select the required position for the grille. Ensure there are no obstructions above the ceiling in the selected location. Using the template provided, mark hole for the grille as follows:
 - 200 dia grille: hole sizes 314mm dia
 - 250 dia grille: hole sizes 314mm dia
 - 300 dia grille: hole sizes 314mm dia


2. Carefully cut opening in ceiling

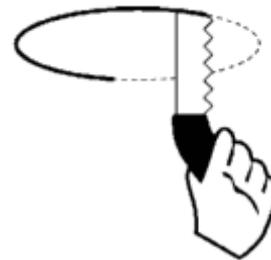

3. Pull the duct through the opening in the ceiling and attach the grille to the duct using duct tape.



4. Load the clips in the upright positions. TAKE CARE you do not accidentally trigger a clip and catch your finger.

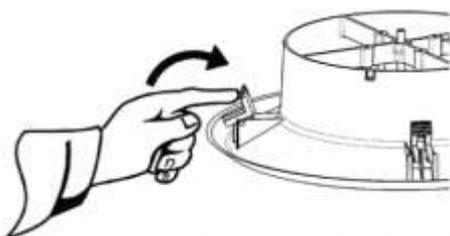


5. Carefully pass the grille up into the opening ensuring all clips are triggered down.



6. Adjust the air quantity by spinning the diffuser cone clockwise or anticlockwise - Clockwise to close



Anticlockwise to open



7. To clean grille wipe down with warm soapy water.
8. Please recycle all packaging